Retail Digital Sign

BRIGHTNESS: 2500 NITS



Brightness

2500-700 nits
Side A Face to Outdoor
Side B Face to Indoor

Thickness

Two Display
Back to Back
48mm Thickness

Media

Android OS
Dual Sided Displays
with Different Contents

INDUSTRIAL DESIGN

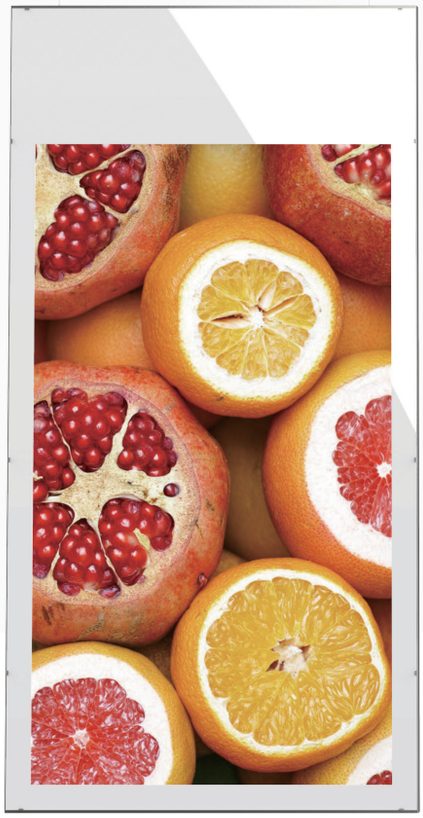



Tempered Glass
Cover Glass

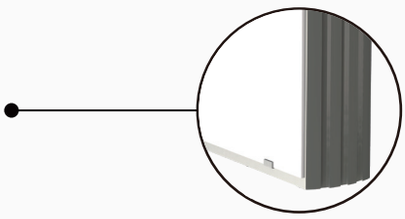

Aluminum
Framework



FHD SCREEN
IPS Commercial Panel
178° Wide Angle



Android OS

Dual Sided Displays
with Different Contents

TECH SPEC

Panel

Size	55
Active Display Area (H x V mm)	1209.6 x 680.4
Brightness	2500 nits
Resolution	1920 x 1080
Aspect Ratio	16 : 9
Backlight Adjustment	Automatic (Ambient Light Sensor)
Viewing Angle	178°/178°
Backlight Configuration	LED
Operation Life Cycle-mtbf(hours)	50,000

Mechanical

Dimensions(W x H x D)	794 x 1567 x 48 mm
Net Weight	36 kg
Enclosure Material	Aluminum + Steel
Finishing	Fine Grain Powder Coating
Colour	Gary (Ral 7038)
Glass (not cover display area)	Tempered Glass Painted Patone White C
Speaker	8Ω 2W (x 2)

Power

AC Input	110 - 220 VAC , 50 / 60 Hz
Power Consumption	450 w

Environmental

Operating Enviroment	Indoor
Opertaing Temperature	0°C~40°C
Operating Humidity	10%~80%
Operating Altitude	≤ 2000m

Media

	Android OS	HMDI in
OS	Android 7.1	N / A
CPU	RK3288 1.8GHz	TSUMU58
GPU	Mali-T764	N / A
Memory	2GB (DDR3)	N / A
ROM	16GB (eMMC)	N / A
HDMI	HDMI Output (x 1)	HDMI Input (x 2)
USB Data Input	USB 2.0 (x 1)	N / A
Analog Audio Output	3.5mm Headphone Jack (x1)	3.5mm Headphone Jack (x1)
Ethernet	RJ-45 (x 1)	N / A
WiFi	802.11/b/g/n	N / A

DIMENSIONS

Outline Dimensions

Hanging Bracket Dimensions

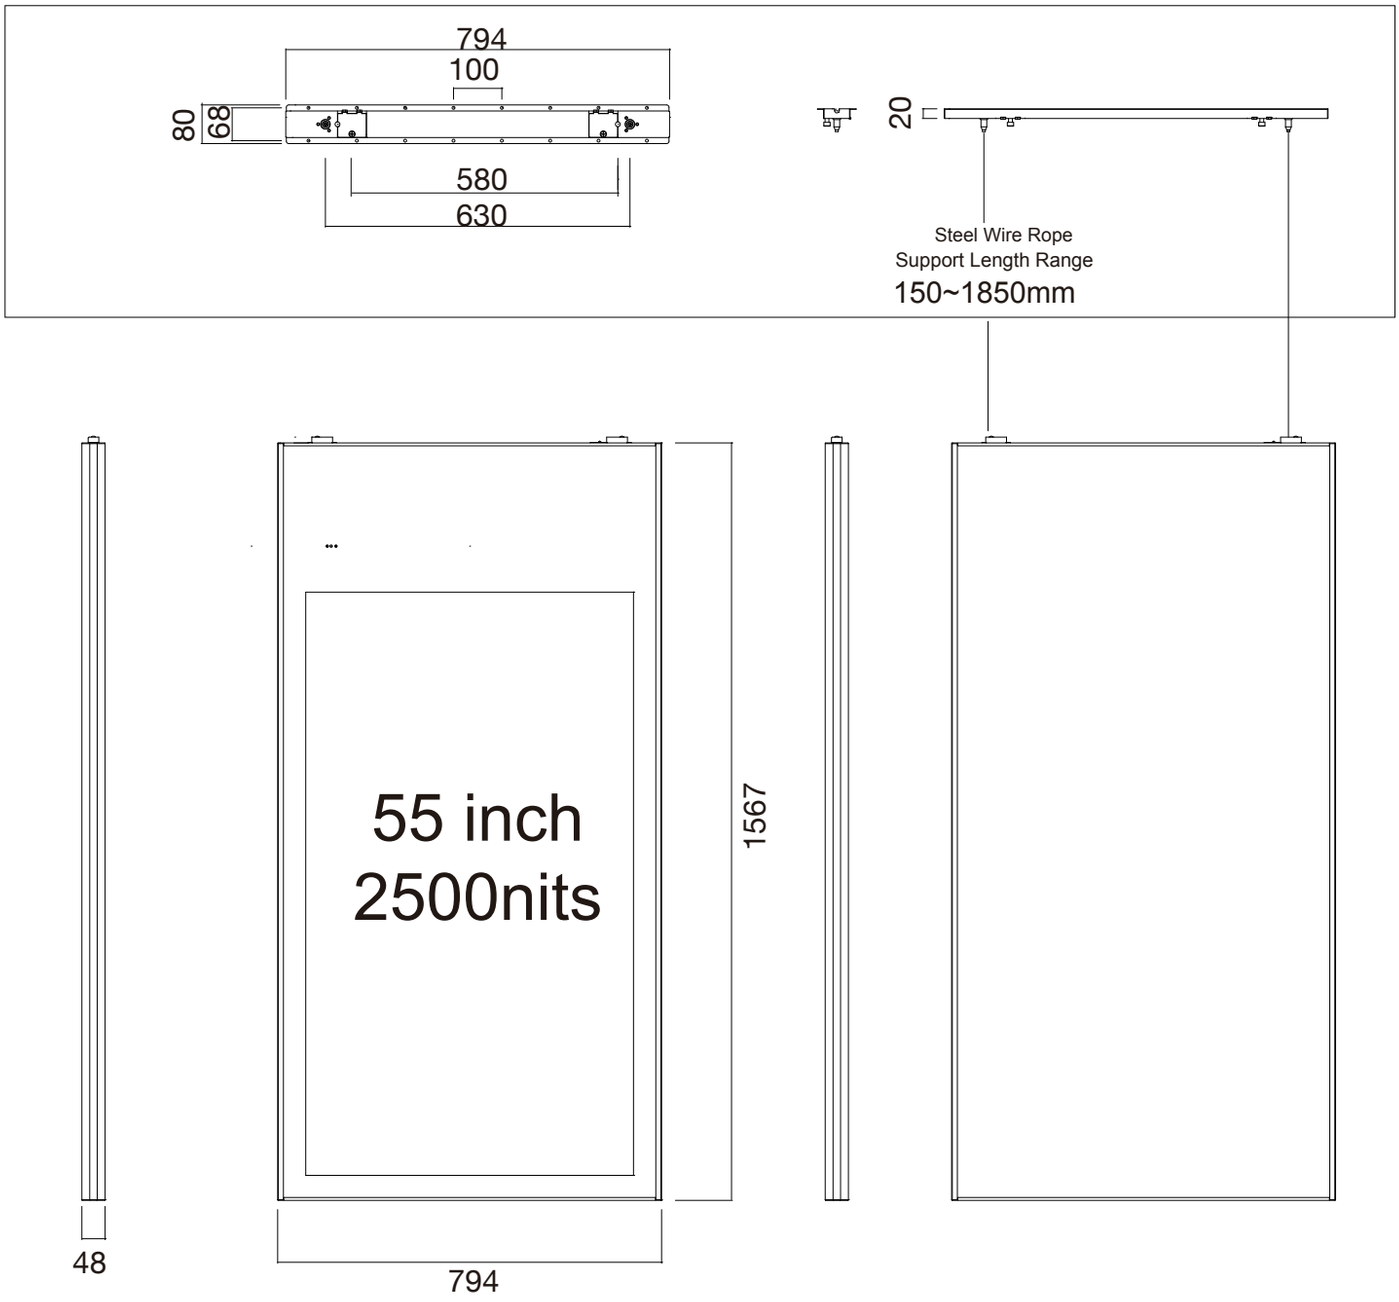

I / O PORTS

Top View



43inch

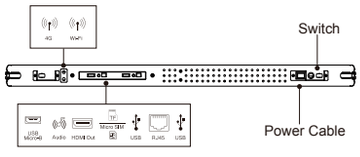

55inch

Bottom View



Keewin
Created By People Who Care
Copyright 2021 © Keewin Display Co., Ltd.
All rights reserved. Equipment design and specifications may be changed without notice.